


WQY Y 型三通 Y-Distributor

- 温度: -40°C~120°C, 短时达到150°C
- 颜色: 深灰色(RAL 7037), 黑色(RAL 9005)
- 材料: 丁腈橡胶
- 防护等级: IP66

- Temperature Range: Min-40 °C, Max120 °C, Short-term150 °C
- Color: grey (RAL 7037), black (RAL 9005)
- Material: Nitrile Rubber
- Protection degree: IP66




灰色编号 article no. grey	黑色编号 article no. black	软管1 AD1 mm	软管2 AD2 mm	外径1 φ B1 mm	外径2 φ B2 mm	总长 E mm	总宽 D mm	安装孔 φ F mm	包装单位 Packet units
* WQY 10.0/2×10.0G	WQY 10.0/2×10.0B	10.0	2×10.0	17.5	17.5	54.5	36.5	1×4	25
WQY 21.2/2×15.8G	WQY 21.2/2×15.8B	21.2	2×15.8	29.5	24	75	52	1×4	25
* WQY 28.5/2×15.8G	WQY 28.5/2×15.8B	28.5	2×15.8	36.5	25	75	52	1×4	20
* WQY 18.5/2×18.5G	WQY 18.5/2×18.5B	18.5	2×18.5	26.5	26.5	81	54.5	1×4	20
WQY 21.2/2×21.2G	WQY 21.2/2×21.2B	21.2	2×21.2	31	31.5	75	64.5	1×4	10
WQY 28.5/2×21.2G	WQY 28.5/2×21.2B	28.5	2×21.2	36.5	29.5	81	60.5	1×4	10
WQY 34.5/2×28.5G	WQY 34.5/2×28.5B	34.5	2×28.5	42.5	36.5	86	77	1×4	5
WQY 42.5/2×34.5G	WQY 42.5/2×34.5B	42.5	2×34.5	52.5	42.5	98.5	89	1×4	5
* WQY 54.5/2×42.5G	WQY 54.5/2×42.5B	54.5	2×42.5	65.5	52.5	116	109.5	1×4	5


WQY-PA Y 型三通 Plastic Y-Distributor

- 温度: -40°C~100°C, 短时达到120°C
- 颜色: 深灰色(RAL 7037), 黑色(RAL 9005)
- 材料: 尼龙
- 防护等级: IP68

- Temperature Range: Min-40 °C, Max115 °C, Short-term150 °C
- Color: grey (RAL 7037), black (RAL 9005)
- Material: Polyamide
- Protection degree: IP68

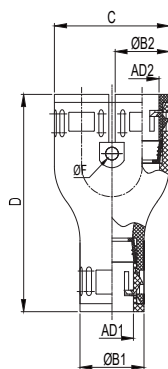

尼龙



灰色编号 article no. grey	黑色编号 article no. black	软管1 AD1 mm	软管2 AD2 mm	外径 φ B1 mm	外径 φ B2 mm	总长 D mm	总宽 C mm	安装孔 φ F mm	孔间距 E mm	包装单位 Packet units
WQY-PA 13.0/2×10.0G	WQY-PA 13.0/2×10.0B	13.0	2×10.0	20	17	68	36	1×4	-	25
WQY-PA 13.0/2×13.0G	WQY-PA 13.0/2×13.0B	13.0	2×13.0	20	20	70	42	1×4	-	25
WQY-PA 15.8/2×13.0G	WQY-PA 15.8/2×13.0B	15.8	2×13.0	23	20	71	42	1×4	-	25
WQY-PA 15.8/2×15.8G	WQY-PA 15.8/2×15.8B	15.8	2×15.8	23	23	79	74	1×4	-	25
WQY-PA 21.2/2×13.0G	WQY-PA 21.2/2×13.0B	21.2	2×13.0	29.5	20	73.5	42	1×4	-	25
WQY-PA 21.2/2×15.8G	WQY-PA 21.2/2×15.8B	21.2	2×15.8	29.5	23	87	47	2×6.5	33	20
WQY-PA 28.5/2×21.2G	WQY-PA 28.5/2×21.2B	28.5	2×21.2	37	29.5	99	60	2×6.5	38.5	10
WQY-PA 34.5/2×28.5G	WQY-PA 34.5/2×28.5B	34.5	2×28.5	44	37	106	75	2×6.5	47	5
WQY-PA 42.5/2×34.5G	WQY-PA 42.5/2×34.5B	34.5	2×34.5	52	44	126	90	2×6.5	49	5
WQY-PA 54.5/2×42.5G	WQY-PA 54.5/2×42.5B	54.5	2×42.5	64	52	130	106	2×6.5	62	5