


WQSC 带盖固定座 Tubing Clamp

- 材料: 尼龙
- 颜色: 深灰色(RAL 7037), 黑色(RAL 9005)
- 温度: -30°C~100°C短时达到120°C
- 阻燃等级: V2(UL94)
- 性能: 自熄灭性好, 不含卤素、磷、镉等, 通过RoHS测试适用于软管固定

- Material: Polyamide
- Color: grey (RAL 7037), black (RAL 9005)
- Temperature Range: Min-30°C, Max100°C, Short-term 120°C
- Flame-retardant: V2(UL94)
- Flame-retardant: Self-extinguishing, free of halogen, phosphor and cadmium, passed RoHS, for fixing the conduits.

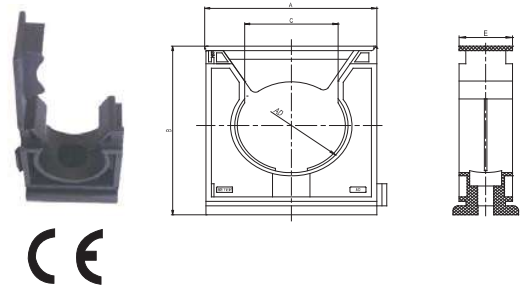

灰色编号 article no. grey	黑色编号 article no. black	适配软管AD Fits to tubing size	A mm	B mm	C mm	E mm	安装螺钉 Fixing Screw mm	包装单位 Packet units
WQSC-AD10.0G	WQSC-AD10.0B	AD10.0	21.5	23.5	8.2	20	M4	50
WQSC-AD13.0G	WQSC-AD13.0B	AD13.0	26	29.5	9.5	20	M4	50
WQSC-AD15.8G	WQSC-AD15.8B	AD15.8	26	29.5	11.7	20	M5	50
WQSC-AD18.5G	WQSC-AD18.5B	AD18.5	32	37	14	20	M5	50
WQSC-AD21.2G	WQSC-AD21.2B	AD21.2	32	37	16.6	20	M5	60
WQSC-AD28.5G	WQSC-AD28.5B	AD28.5	43	50	22	20	M5	25
WQSC-AD34.5G	WQSC-AD34.5B	AD34.5	43	51	25.5	20	M6	25
WQSC-AD42.5G	WQSC-AD42.5B	AD42.5	64	77	35	20	M6	10
WQSC-AD54.5G	WQSC-AD54.5B	AD54.5	64	77	40	20	M6	10

WQS/WQSG 固定座 Tubing Clamp

- 材料: 尼龙
- 颜色: 深灰色(RAL 7037), 黑色(RAL 9005)
- 温度: -30°C~100°C短时达到120°C
- 阻燃等级: V2(UL94)
- 性能: 自熄灭性好, 不含卤素、磷、镉, 通过RoHS测试适用于软管固定

- Material: Polyamide
- Color: grey (RAL 7037), black (RAL 9005)
- Temperature Range: Min-30°C, Max100°C, Short-term 120°C
- Flame-retardant: V2(UL94)
- Flame-retardant: Self-extinguishing, free of halogen, phosphor and cadmium, passed RoHS, for fixing the conduits.



灰色编号 article no. grey	黑色编号 article no. black	适配软管AD Fits to tubing size	A mm	B mm	C mm	E mm	安装螺钉 Fixing Screw mm	包装单位 Packet units
WQS-AD10.0G	WQS-AD10.0B	AD10.0	25	23	12.5	M4	7.5	50
WQS-AD13.0G	WQS-AD13.0B	AD13.0	30	23	13	M5	9	50
WQS-AD15.8G	WQS-AD15.8B	AD15.8	30	23	12.5	M5	9	50
WQS-AD18.5G	WQS-AD18.5B	AD18.5	35	30	15	M5	9	50
WQS-AD21.2G	WQS-AD21.2B	AD21.2	35	30	15	M6	11.6	25
WQS-AD25.5G	WQS-AD25.5B	AD25.5	40	33.6	16	M6	11.5	25
WQS-AD28.5G	WQS-AD28.5B	AD28.5	42	38	16	M6	11.7	25
WQS-AD31.5G	WQS-AD31.5B	AD31.5	50	40	16	M6	11.5	25
WQS-AD34.5G	WQS-AD34.5B	AD34.5	51	43	16.3	M6	11.5	25
WQS-AD42.5G	WQS-AD42.5B	AD42.5	59	51	18	M6	11.8	25
WQS-AD54.5G	WQS-AD54.5B	AD54.5	72	65	20	M6	11.6	25

注: WQS固定座如图加上盖, 规格为 WQSG 轻型带盖固定座 Adding the cap to WQS, it becomes WQSG light-duty tubing clamp.