


WQG1 快速软管接头 Quick Screw Connector

- 材料: 尼龙
- 颜色: 深灰色(RAL 7037), 黑色(RAL 9005)
- 温度: -40°C~100°C, 短时达到120°C
- 阻燃等级: V2(UL94)
- 防护等级: IP66
- 阻燃性能: 自熄灭性好, 不含卤素、磷、镉, 通过RoHS测试
- 适配: 除重载型WYK软管外的所有软管

- Material: Polyamide
- Color: grey (RAL 7037), black (RAL 9005)
- Temperature Range: Min-40°C Max100°C, Short-term120°C
- Flame-retardant: V2(UL94)
- Protection degree: IP66
- Flame-retardant: Self-extinguishing, free of halogen, phosphor and cadmium, passed RoHS.
- Fit with: All tubing except Overload type WYK tubing



UL证书号: E317026

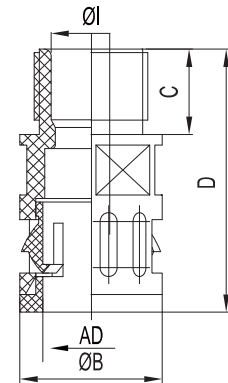

WQG1-P 德国PG制螺纹 German PG Thread

灰色编号 article no. grey	黑色编号 article no. black	螺纹规格 Thread Dimension	适配软管AD Fits to tubing size	螺纹外径 Thread OD	螺纹长度C Thread length	孔径 φ I mm	外径 φ B mm	长度D Total length mm	扳手尺寸 SW wrench size	包装单位 Packet units
WQG1-P07G/AD10.0	WQG1-P07B/AD10.0	PG7	AD10.0	12.5	12	7	17	35	15.5	50
WQG1-P09G/AD13.0	WQG1-P09B/AD13.0	PG9	AD13.0	15.2	12	10	20	37	18	50
WQG1-P11G/AD15.8	WQG1-P11B/AD15.8	PG11	AD15.8	18.6	12	12	23	39.5	21	50
WQG1-P13.5G/AD18.5	WQG1-P13.5B/AD18.5	PG13.5	AD18.5	20.4	13	14.5	26	42	24	50
WQG1-P13.5G/AD21.2	WQG1-P13.5B/AD21.2	PG13.5	AD21.2	20.4	13	15.5	29.5	42	27	50
WQG1-P16G/AD21.2	WQG1-P16B/AD21.2	PG16	AD21.2	22.5	13	17	29.5	45	27	50
WQG1-P21G/AD25.5	WQG1-P21B/AD25.5	PG21	AD25.5	28.3	13	23	34	46.5	31	25
WQG1-P21G/AD28.5	WQG1-P21B/AD28.5	PG21	AD28.5	28.3	13	23.5	37	47	34	25
WQG1-P29G/AD31.5	WQG1-P29B/AD31.5	PG29	AD31.5	37	15	26	41	51	37	25
WQG1-P29G/AD34.5	WQG1-P29B/AD34.5	PG29	AD34.5	37	15	30	44	51	40	25
WQG1-P36G/AD42.5	WQG1-P36B/AD42.5	PG36	AD42.5	47	15	36.5	52	54	50	10
WQG1-P48G/AD54.5	WQG1-P48B/AD54.5	PG48	AD54.5	59.3	16	48	64	55	60	5

WQG1-G G制管螺纹 GThread

灰色编号 article no. grey	黑色编号 article no. black	螺纹规格 Thread Dimension	适配软管AD Fits to tubing size	螺纹长度C Thread length	孔径 φ I mm	外径 φ B mm	长度D Total length mm	扳手尺寸 SW wrench size	包装单位 Packet units
WQG1-G1/4G/AD10.0	WQG1-G1/4B/AD10.0	G1/4"	AD10.0	12	7	17	35	15.5	50
WQG1-G3/8G/AD13.0	WQG1-G3/8B/AD13.0	G3/8"	AD13.0	12	10	20	37	18	50
WQG1-G3/8G/AD15.8	WQG1-G3/8B/AD15.8	G3/8"	AD15.8	12	12	23	39.5	21	50
WQG1-G1/2G/AD15.8	WQG1-G1/2B/AD15.8	G1/2"	AD15.8	12	12.5	23	39.5	24	50
WQG1-G1/2G/AD21.2	WQG1-G1/2B/AD21.2	G1/2"	AD21.2	13	15	29.5	45	27	50
WQG1-G3/4G/AD25.5	WQG1-G3/4B/AD25.5	G3/4"	AD25.5	13	21	34	46.5	31	25
WQG1-G3/4G/AD28.5	WQG1-G3/4B/AD28.5	G3/4"	AD28.5	13	20.5	37	47	34	25
WQG1-G1G/AD31.5	WQG1-G1B/AD31.5	G1"	AD31.5	15	26	41	51	37	25
WQG1-G1G/AD34.5	WQG1-G1B/AD34.5	G1"	AD34.5	15	25.5	44	51	40	25
WQG1-G1 1/4G/AD42.5	WQG1-G1 1/4B/AD42.5	G1 1/4"	AD42.5	15	35	52	54	50	10
WQG1-G1 1/2G/AD54.5	WQG1-G1 1/2B/AD54.5	G1 1/2"	AD54.5	16	39	64	55	60	5
WQG1-G 2G/AD54.5	WQG1-G2B/AD54.5	G2"	AD54.5	16	48	64	55	60	5

注: 同时可提供NPT制螺纹Remark: we can provide products with NPT thread also