


WQGMZ 带锁紧金属螺纹软管接头 Connectors,Conically Sealing,With Strain Relief,With Metal Thread

- 材料:尼龙和青铜镀镍螺纹制成
- 颜色:深灰色(RAL 7037),黑色(RAL 9005)
- 温度:-40°C~100°C,短时达到120°C
- 阻燃等级:V2(UL94)
- 防护等级:涂螺纹密封胶后,可达到IP68
- 性能:自熄灭性好,不含卤素、磷、镉,通过RoHS测试
- 特性:极好的抗冲击强度,极高强度的螺纹连接,并能紧固所穿电缆。
- 适配:除重载型WYK软管外的所有软管

- Material: Polyamide with nickel-plated brass thread.
- Color: grey (RAL 7037), black (RAL 9005)
- Temperature Range: Min-40°C, Max 100°C, Short-term 120°C
- Flame-retardant: V2(UL94)
- Protection degree: IP68, using sealing gum around the thread
- Flame-retardant: Self-extinguishing, free of halogen, phosphor and cadmium, passed RoHS
- Properties: excellent impact resistance, high-intensity thread connection, fastening the cables.
- Fit with: All tubing except Overload type WYK tubing

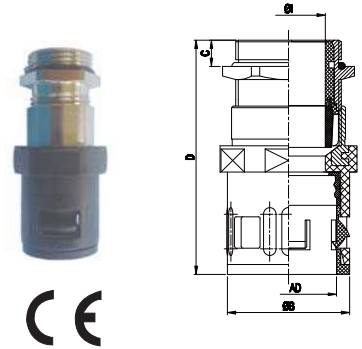

WQGMZ-M 公制螺纹 Metric Thread

灰色编号 article no. grey	黑色编号 article no. black	螺纹规格 Thread Dimension	适配软管AD Fits to tubing size	卡口范围 Clamping Range mm	螺纹长度C Thread length	孔径 φ I mm	外径 φ B mm	长度D Total length mm	包装单位 Packet units
WQGMZ-M12G/AD10.0	WQGMZ-M12B/AD10.0	M12×1.5	AD10.0	3~6.5	6	6.6	17	50	50
WQGMZ-M16G/AD13.0	WQGMZ-M16B/AD13.0	M16×1.5	AD13.0	4~8	7	8.4	20	55	50
WQGMZ-M18G/AD15.8	WQGMZ-M18B/AD15.8	M18×1.5	AD15.8	5~10	7	10.2	23	57.5	50
WQGMZ-M20G-H/AD15.8	WQGMZ-M20B-H/AD15.8	M20×1.5	AD15.8	5~10	7	10.2	23	63.5	50
WQGMZ-M20G/AD18.5	WQGMZ-M20B/AD18.5	M20×1.5	AD15.8	6~12	7	12.2	26	62	25
WQGMZ-M20G-D/AD21.2	WQGMZ-M20B-D/AD21.2	M20×1.5	AD21.2	8~14	7	14.2	29.5	64	25
WQGMZ-M22G/AD21.2	WQGMZ-M22B/AD21.2	M22×1.5	AD21.2	8~14	7	14.2	29.5	64	25
WQGMZ-M25G/AD21.2	WQGMZ-M25B/AD21.2	M25×1.5	AD21.2	10~16	7	16.2	29.5	65.5	25
WQGMZ-M25G-D/AD28.5	WQGMZ-M25B-D/AD28.5	M25×1.5	AD28.5	13~18	7	18.4	37	68	20
WQGMZ-M27G/AD28.5	WQGMZ-M27B/AD28.5	M27×2.0	AD28.5	13~18	8	18.4	37	69	20
WQGMZ-M30G/AD28.5	WQGMZ-M30B/AD28.5	M30×2.0	AD28.5	13~18	8	18.4	37	69	20
WQGMZ-M32G-D/AD34.5	WQGMZ-M32B-D/AD34.5	M32×1.5	AD34.5	18~25	8	25.2	44	79.5	10
WQGMZ-M36G/AD34.5	WQGMZ-M36B/AD34.5	M36×2.0	AD34.5	18~25	8	25.2	44	79.5	10
WQGMZ-M40G-D/AD42.5	WQGMZ-M40B-D/AD42.5	M40×1.5	AD42.5	22~32	9	32.5	52	86.5	10
WQGMZ-M48G/AD42.5	WQGMZ-M48B/AD42.5	M48×2.0	AD42.5	22~32	9	32.5	52	86.5	10
WQGMZ-M50G/AD54.5	WQGMZ-M50B/AD54.5	M50×1.5	AD54.5	30~38	9	39	64	96	5
WQGMZ-M50G-D/AD54.5	WQGMZ-M50B-D/AD54.5	M50×1.5	AD54.5	37~44	9	44.5	64	96.5	5
WQGMZ-M63G/AD54.5	WQGMZ-M63B/AD54.5	M63×1.5	AD54.5	37~44	10	44.5	64	97.5	5
WQGMZ-M64G/AD54.5	WQGMZ-M64B/AD54.5	M64×2.0	AD54.5	37~44	10	44.5	64	97.5	5

WQGMZ-P 德国PG螺纹 German PG Thread

灰色编号 article no. grey	黑色编号 article no. black	螺纹规格 Thread Dimension	适配软管AD Fits to tubing size	卡口范围 Clamping Range mm	螺纹长度C Thread length	孔径 φ I mm	外径 φ B mm	长度D Total length mm	包装单位 Packet units
WQGMZ-P07G/AD10.0	WQGMZ-P07B/AD10.0	PG7	AD10.0	3~6.5	6	6.6	17	50	50
WQGMZ-P09G/AD13.0	WQGMZ-P09B/AD13.0	PG9	AD13.0	4~8	7	8.4	20	55	50
WQGMZ-P11G/AD15.8	WQGMZ-P11B/AD15.8	PG11	AD15.5	5~10	7	10.2	23	57.5	50
WQGMZ-P13.5G/AD18.5	WQGMZ-P13.5B/AD18.5	PG13.5	AD18.5	6~12	7	12.2	26	62	50
WQGMZ-P16G/AD21.2	WQGMZ-P16B/AD21.2	PG16	AD21.2	8~14	7	14.2	29.5	64	25
WQGMZ-P21G/AD28.5	WQGMZ-P21B/AD28.5	PG21	AD28.5	13~18	8	18.4	37	68	20
WQGMZ-P29G/AD34.5	WQGMZ-P29B/AD34.5	PG29	AD34.5	18~25	8	25.2	44	79.5	10
WQGMZ-P36G/AD42.5	WQGMZ-P36B/AD42.5	PG36	AD42.5	22~32	9	32.5	52	86.5	10
WQGMZ-P48G/AD54.5	WQGMZ-P48B/AD54.5	PG48	AD54.5	37~44	10	44.5	64	97.5	5