


# Pre-insulated Pin terminals

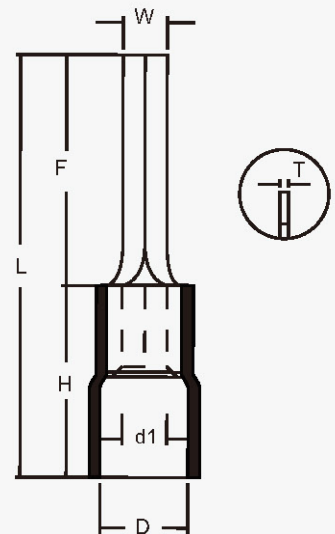

Available range	Single Grip	Double Grip	Dimensions(mm)		
			W	F	L
<b>Cross-section: 0.75-1.5mm<sup>2</sup></b> <b>A.W.G.: 22-16</b> <b>I<sub>max</sub>=19A</b> <b>Insulator colour: Red</b> <b>Surface handling: Tin / 3μ</b> <b>Annealing: Yes</b>  <b>H=10.0 d1=1.7 D=4 T=0.75</b>	PTV1.25-9	PTVD1.25-9	1.9	9.0	18.8
	PTV1.25-10	PTVD1.25-10		10.0	19.8
	PTV1.25-12	PTVD1.25-12		12.0	21.8
	PTV1.25-13	PTVD1.25-13		13.0	22.8
	PTV1.25-14	PTVD1.25-14		14.0	23.8
	PTV1.25-18	PTVD1.25-18		18.0	27.8
<b>Cross-section: 1.5-2.5mm<sup>2</sup></b> <b>A.W.G.: 16-14</b> <b>I<sub>max</sub>=27A</b> <b>Insulator colour: Blue</b> <b>Surface handling: Tin / 3μ</b> <b>Annealing: Yes</b> <b>H=10.0 d1=2.3 D=4.5 T=0.8</b>	PTV2-9	PTVD2-9	1.9	9.0	18.8
	PTV2-10	PTVD2-10		10.0	19.8
	PTV2-12	PTVD2-12		12.0	21.8
	PTV2-13	PTVD2-13		13.0	22.8
	PTV2-18	PTVD2-18		18.0	27.8
<b>Cross-section: 4-6mm<sup>2</sup></b> <b>A.W.G.: 12-10</b> <b>I<sub>max</sub>=48A</b> <b>Insulator colour: Yellow</b> <b>Surface handling: Tin / 3μ</b> <b>Annealing: Yes</b> <b>H=13.0 d1=3.4 D=6.4 T=1.0</b>	PTV5.5-13	PTVD5.5-13	2.8	17.0	27.0
	PTV5.5-18	PTVD5.5-18		18.0	30.5
	PTV5.5-25	PTVD5.5-25		25.0	38.0